

Flow sensor for liquid media type 236

Flow range

1.8 ... 240 l/min

Nominal diameters

DN 10 / 32

Temperature measurement

-40 ... +125 °C



The type 236 is based on the type 210 but incorporates a brass housing. The Vortex Sensor type 236 has a rugged construction of brass connection. This flow sensor is available with a larger variety concerning power supply and outputs.

You can choose between various versions as integrated temperature measurement. With no moving parts the flow sensor is not sensitive to debris, has marginal pressure loss and high accuracy.

- Flow measuring with voltage, current or frequency output
- Temperature non-sensitive measuring principle
- Excellent media resistance (measuring element not in contact with the media)
- CE conformity
- Wide application temperature range
- Marginal loss of pressure
- Measuring element not sensitive to debris
- Direct temperature measurement in the medium

Technical Overview

Flow measurement

| | | |
|------------------------------|------------------------------------|------------------------------|
| Measuring principle | Vortex | Piezoelectric sensor element |
| Measuring range | | 1.8 ... 240 l/min |
| Nominal diameters | | DN 10 / 25 |
| Accuracy at < 50% fs (water) | | < 1% fs |
| Accuracy at > 50% fs (water) | | < 2% measuring value |
| Response time | Immediately | Signal delay < 100 ms |
| | Therefore suitable for spigot use. | Response time < 5 ms |
| | | Frequency output |
| | | Analogue output |
| | | Signal delay < 2 s |
| | | Response time < 500 ms |

Temperature measurement

| | | | |
|------------------------|------------------------------------|----------------------|--|
| Measuring principle | Resistance | | PT1000 |
| | Measuring range | | -40 ... +125 °C |
| PT1000 | Accuracy | class B DIN EN 60751 | @ T = 0 °C @ T ≠ 0 °C |
| | | | ± 0.3 K ± 0.3 K ± 0.005 * T |
| | Measuring range | | -25 ... +125 °C |
| 0 ... 10 V | Accuracy | | ± 0.5 K ± 0.005 * T |
| | Calculation temperature | | T (°C) = ±150 °C / 10 V * U _{OUT,T} - 25 °C |
| Temperature influences | Self-heating at temperature sensor | | 1 K/mW |
| | Conduction resistance to connector | | 0.8 Ohm |

Operating conditions

| | | |
|--------------------------------------|---|---|
| Medium | Suitable for heating circuit water with the usual additives Drinking water | Other medium on request |
| temperature | Media | ≤ +125 °C |
| | Ambient | -15 ... +85 °C |
| | Storage | -30 ... +85 °C |
| | | (for lifetime) |
| Max. pressure and medium temperature | | 12 bar at +40 °C |
| | | (for lifetime) |
| | | 6 bar at +100 °C |
| | | (for 600 hours) |
| | | 4 bar at +125 °C |
| | | (for 2 hours) |
| | | 4 bar at +140 °C |
| | | (max. test pressure) |
| | | 18 bar at +40 °C |
| Cavitation | The following equation is valid to prevent cavitation: | $P_{abs.outlet} / P_{difference} > 5.5$ |

Materials in contact with medium (FDA-conform)

| | |
|------------------------|-------------------------------------|
| Sensor paddle | ETFE |
| Case with damming body | Brass (CuZn40PbZ), PA6T/6I (40% GF) |
| Sealing material | EPDM (perox.) FPM |

Electrical overview

| | | Frequency output | Voltage output | Current output |
|--|--|--|-----------------------------|-----------------------------------|
| Power supply | U _{IN} | 4.75 ... 33 VDC | 11.5 ... 33 VDC | 8 ... 33 VDC |
| Output | Frequency square pulse signal U _{OUT_Q_frequency} | < 0.5 ... > U _{IN} - 0.5 V | - | - |
| Flow (Q) | Analogue signal | U _{OUT_Q} or I _{OUT} | 0 ... 10 V | 4 ... 20 mA |
| Output | Resistant signal | R _{OUT_PT1000} | PT1000 class B DIN EN 60751 | |
| temperature (T) | Voltage signal | U _{OUT_T} | 0 ... 10 V | - |
| Electrical connection and protection class | | | M12x1 (IP 65) | M12x1 (IP 65) |
| Load against GND or IN | | | < 1 mA / < 100 nF | < 6 mA / < 100 nF ¹⁾ |
| Current consumption load free (I _{IN}) | | | < 2mA | < (U _{IN} - 8 V) / 20 mA |
| | | | < 5 mA | - |

Weight

| | |
|---------------------|---------|
| DN 10 with thread K | ~ 170 g |
| DN 10 with thread G | ~ 250 g |
| DN 32 | ~ 650 g |


Test / Admissions

| | |
|-------------------------------|---------------------------------|
| Electromagnetic compatibility | CE-conform acc. to EN 61326-2-3 |
|-------------------------------|---------------------------------|

Packaging

| | |
|--------------------|--|
| Single packaging | |
| Multiple packaging | |

Minimum life span on high flow rate and high temperature

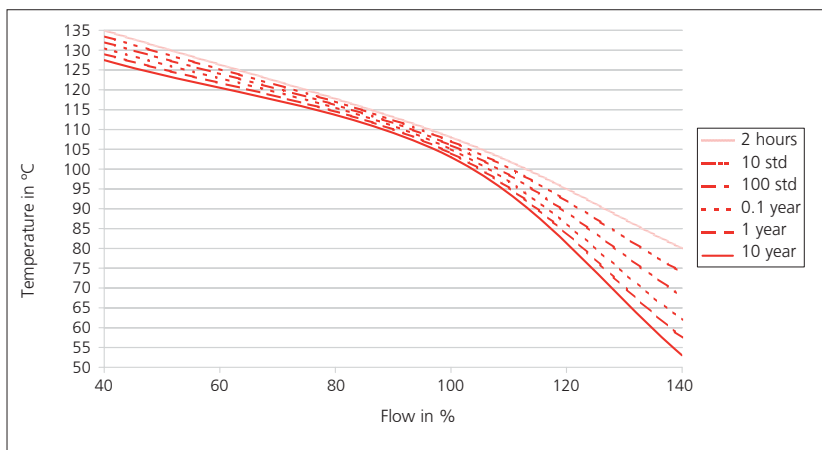

Nominal diameters dependent variables

| Nominal diameters | Tube connection | Measuring range | Quantity per puls @ 50% fs | Flow range | Characteristic line frequency output | Frequency range | Characteristic line voltage output | Characteristic line current output | Pressure drop ^{1), 2)} |
|-------------------|-----------------|------------------|----------------------------|---------------------|--------------------------------------|-----------------|------------------------------------|------------------------------------|---------------------------------|
| DN 10 | K | 1.8 ... 32 l/min | 1.416 ml | 0.265 ... 4.716 m/s | 0.0860 * f - 0.2 | 23 ... 374 Hz | Q = 3.2 * U _{out,Q} | Q = 2.000 * (I - 4 mA) | 22.50 * Q ² |
| DN 10 | G | 1.8 ... 32 l/min | 1.386 ml | 0.295 ... 5.895 m/s | 0.0847 * f - 0.2 | 24 ... 380 Hz | Q = 4.0 * U _{out,Q} | Q = 2.500 * (I - 4 mA) | 22.50 * Q ² |
| DN 10 | K | 2.0 ... 40 l/min | 1.419 ml | 0.265 ... 4.716 m/s | 0.0860 * f - 0.2 | 26 ... 467 Hz | Q = 3.2 * U _{out,Q} | Q = 2.000 * (I - 4 mA) | 22.50 * Q ² |
| DN 10 | G | 2.0 ... 40 l/min | 1.386 ml | 0.295 ... 5.895 m/s | 0.0840 * f - 0.2 | 26 ... 479 Hz | Q = 4.0 * U _{out,Q} | Q = 2.500 * (I - 4 mA) | 22.50 * Q ² |
| DN 32 | K | 14 ... 240 l/min | 27.513 ml | 0.290 ... 4.974 m/s | 1.6710 * f - 1.5 | 9 ... 145 Hz | Q = 24 * U _{out,Q} | Q = 15.000 * (I - 4 mA) | 0.25 * Q ² |

Order code selection table


236. X X X X X X X

| | | | | | | | | | |
|----------------------------------|---|-----|---|---|--|--|---|---|---|
| Version | Flow | 9 | | | | | | 4 | |
| | Flow and temperature (PT1000) | 8 | | | | | | 5 | |
| | Flow and temperature (0 ... 10 V) | 6 | | | | | 3 | 5 | |
| Nominal diameters and flow range | DN 10 1.8 ... 32 l/min. | | 1 | 0 | | | | | |
| | DN 10 2.0 ... 40 l/min. | | 1 | 1 | | | | | |
| | DN 32 14.0 ... 240 l/min. | | 3 | 2 | | | | | K |
| Output and power supply | Frequency output (Square pulse signal) | 8,9 | | | | | | 2 | |
| | Analogue signal 0 ... 10 V | | | | | | | 3 | |
| | Analogue signal 4 ... 20 mA | 8,9 | | | | | | 4 | |
| Electrical connection | Connector M12x1 2- or 3-pole (condensation protection) | 9 | | | | | | 4 | |
| | Connector M12x1 4- or 5-pole (condensation protection) | 8,6 | | | | | | 5 | |
| Sealing material | EPDM Ethylene propylene rubber (peroxidically cross-linked) | | | | | | | | 1 |
| | FPM Fluoro elastomer | | | | | | | | 2 |
| Tube connection | Brass with outside thread K (DN 10 - G ½, DN32 - G 1 ½) | | | | | | | | K |
| | Brass with outside thread G (DN 10 - G 1) | | | | | | | | G |

Accessories³⁾

| | | | | Order number |
|---|--------|--------|--------------------|--------------|
| Straight-wire box for connector M12x1 with cable | 3-pole | 200 cm | | 114605 |
| Corner-wire box for connector M12x1 with cable | 3-pole | 200 cm | | 114604 |
| Straight-wire box for connector M12x1 with cable | 5-pole | 200 cm | (with temperature) | 114564 |
| Corner-wire box for connector M12x1 with cable | 5-pole | 200 cm | (with temperature) | 114563 |
| Straight-wire box for connector M12x1 screwing terminal | 5-pole | | | 115024 |

Dimension diagram DN 10, 32

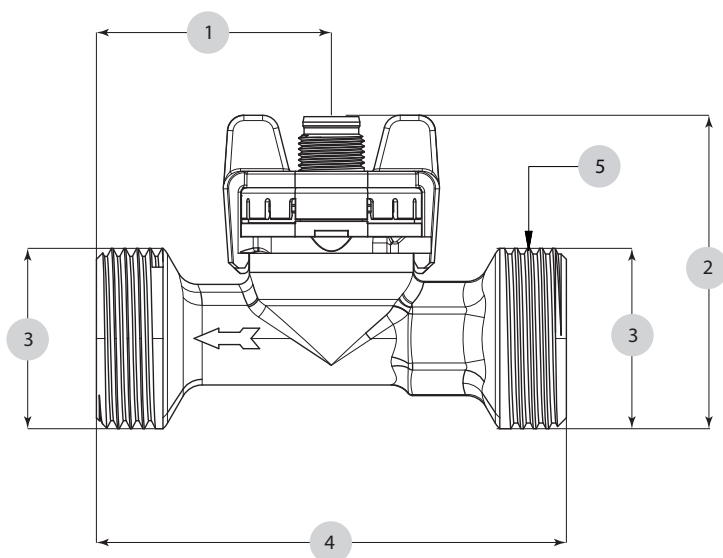

| | 1 | 2 | 3 | 4 | 5 |
|------|----|------|-------|-----|------|
| DN10 | 43 | 57.3 | G 1 | 86 | ↻ 19 |
| DN32 | 50 | 74.9 | G 1 ½ | 134 | ↻ 41 |

¹⁾ incl. 3xDi inlet and outlet side


²⁾ Pv in Pa; Q in l/min

³⁾ Accessories supplied loose

Tube mounting instructions


Consider the following to ensure the correct function of the sensor.

- Only diameter changes from large to small are allowed.
- Avoid repeated elbows in the same level at entryside

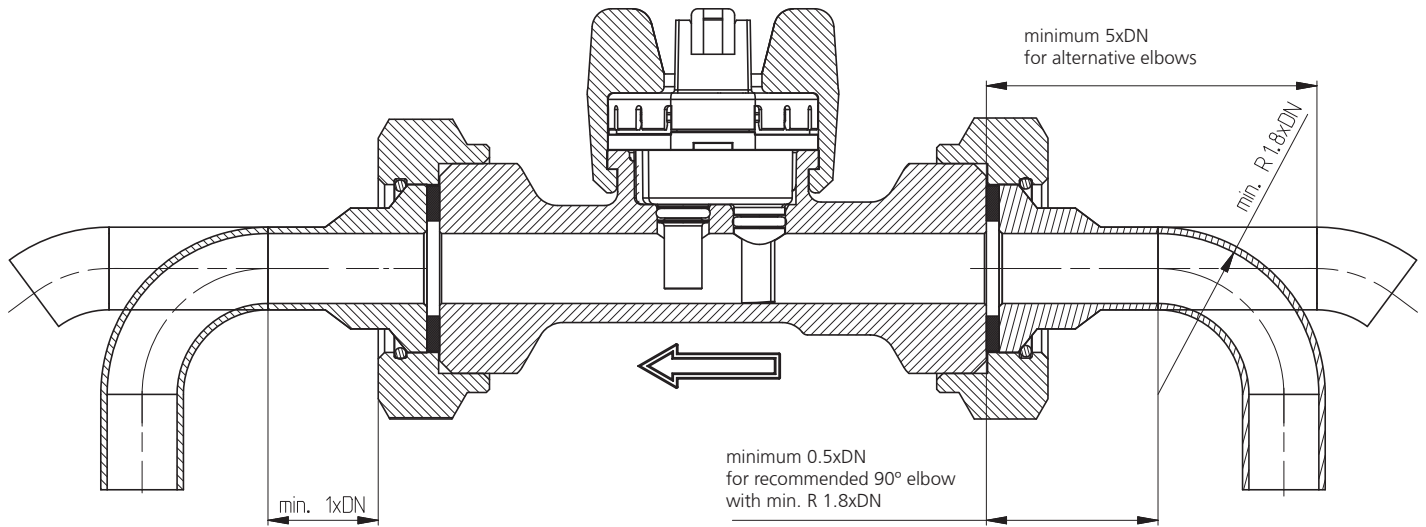


Electrical connection


Connector M12x1 without temperature measurement



Frequency output




current output




voltage output

| Pin | Colour |
|-----|--------|
| 1 | brown |
| 3 | blue |
| 4 | black |
| 1 | brown |
| 2 | white |
| 3 | blue |
| 4 | black |
| 5 | gray |


Connector M12x1 with temperature measurement

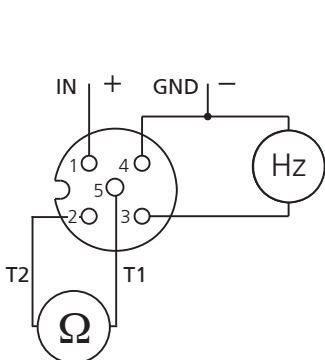


Frequency output with PT1000

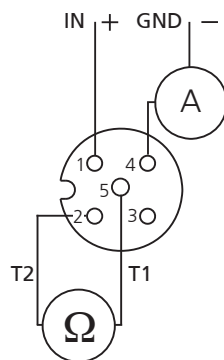

current output with PT1000

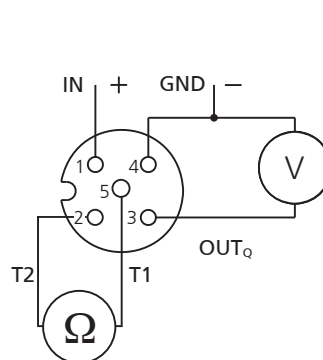

voltage output with PT1000



voltage output with temperature output 0 ... 10 V



FOR FINE PRESSURE AND FLOW MEASUREMENT