

EE800

HVAC Room Transmitter for CO₂, Temperature and Relative Humidity

EE800 combines CO₂, temperature (T) and relative humidity (RH) measurement in one device with modern design. Additionally, it calculates the dewpoint temperature (Td).

The EE800 incorporates the E+E dual wavelength NDIR CO₂ sensor, which compensates for ageing effects, is highly insensitive to pollution and offers outstanding long term stability. A multiple point CO₂ and T factory adjustment procedure leads to excellent CO₂ measurement accuracy over the entire T working range.

EE800 with analogue outputs features an optional passive T sensor, while at EE800 with RS485 additional physical quantities are available on the Modbus RTU and BACnet MS/TP interface: absolute humidity, mixing ratio, enthalpy, frost point temperature and water vapor partial pressure.

The snap-on enclosure saves installation costs and it is available in two sizes according to regional standards. An optional USB configuration adapter facilitates easy setup and adjustment of EE800.



EE800

Typical Applications

Demand controlled ventilation
Heating, ventilation and air conditioning
Building management

Key Features

CO₂ autocalibration
Modbus, BACnet or analogue outputs
Outstanding long-term stability
Temperature compensation
Optional passive T output
Easy installation

Technical Data

Measured values

CO₂

Measurement principle	Dual Wavelength Non-Dispersive Infrared Technology (NDIR)
Working range	0...2000 / 5000 ppm
Accuracy at 25°C (77 °F) and 1013 mbar	0...2000 ppm: < ± (50 ppm +2 % of measuring value) 0...5000 ppm: < ± (50 ppm +3 % of measuring value)
Response time τ ₆₃	typ. 110 s
Temperature dependence	typ. 1 ppm CO ₂ /°C (-20...45 °C) (-4...113 °F)
Calibration interval ¹⁾	>5 years

Temperature

Accuracy ²⁾ at 20°C (68 °F)	±0.3 °C (±0.54 °F) RS485 digital interface; ±0.3 °C (±0.54 °F) voltage output / ±0.7 °C (±1.26 °F) current output
--	--

Relative Humidity

Working range	10...90 % RH
Accuracy at 20°C (68 °F)	±3 % RH (30...70 % RH) ±5 % (10...90 % RH)

Calculated values

Dewpoint temperature³⁾

Working range	-30...55 °C (-22...131 °F)
Accuracy	< ±2 °C (3.6 °F) for T - Td < 25 °C (45 °F) < ±3 °C (5.4 °F) for T - Td < 30 °C (54 °F)

Outputs

Analogue

0...2000 / 5000 ppm	0-5 V / 0-10 V -1 mA < IL < 1 mA 4-20 mA R _L < 500 Ohm
---------------------	--

Digital Interface

	RS485 with max. 32 devices on one bus
Protocol	Modbus RTU or BACnet MS/TP

Temperature passive

	please see ordering guide (only in combination with analogue outputs)
--	---

1) Under normal operating conditions.

2) U_v = 24 V DC and R_L = 250 Ω for version with current output

3) Additional calculated physical quantities available only on the Modbus and BACnet interface: absolute humidity, mixing ratio, enthalpy, frost point temperature and water vapor partial pressure.



General

Supply voltage	24 V AC $\pm 20\%$	15-35 V DC
Current consumption	typ. 14 mA + output current; peak 0.3 A for 0.3 s	
Analogue		
Digital	bias: typ. 11 mA at 15...35 V DC typ. 30 mA at 24 V AC $\pm 20\%$ peak: 150mA at 15...35 V DC, 24 V AC $\pm 20\%$	
Housing (polycarbonate)	US Version: UL94V-0 approved / EU Version: UL94HB approved	
Protection class	IP30	
Display ¹⁾	LC display: alternating CO ₂ / T / RH or Td	
Electrical connection	screw terminals max. 1.5 mm ² (AWG16)	
Electromagnetic compatibility	EN61326-1 EN61326-2-3	CE
	FCC Part 15 ICES-003 ClassB	
Working / Storage T-range	0...90 % RH (non condensing) / -20...60 °C (-4...140 °F)	

- 1) Analogue outputs: The display shows the physical quantities selected for the outputs.
Digital interface: The display shows CO₂ and T for Model M11 and CO₂, T, and RH for Model M12


Connection Diagram

Analogue Output

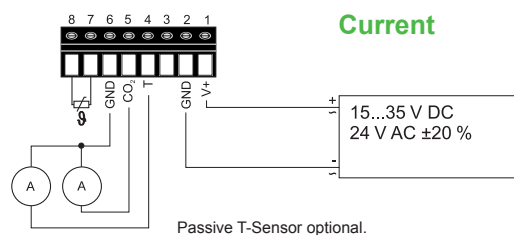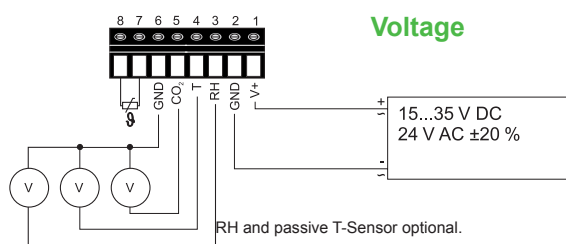


Digital Interface

Connection on the electronics board.

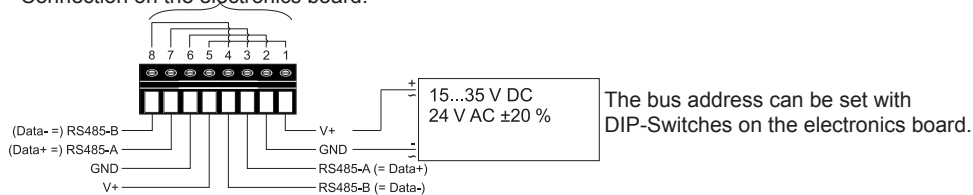

Screw terminals appropriate for daisy-chain wiring

Housing

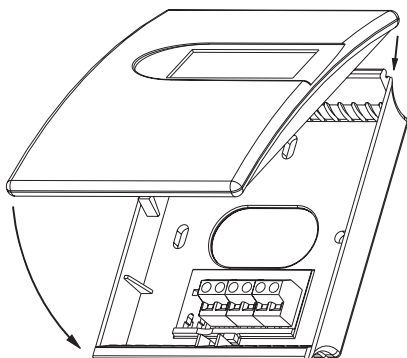

Colour:

Cover: RAL 9003 (signal white)
Back: RAL 7035 (light grey)

EU:

W x H x D = 85 x 100 x 26 mm (3.3 x 3.9 x 1")

US:

W x H x D = 85 x 136 x 26 mm (3.3 x 5.4 x 1")

Ordering Guide

		EE800
Hardware Configuration	Model	CO ₂ + T CO ₂ + T + RH M11 M12
	CO ₂ Range	0 - 2000 ppm 0 - 5000 ppm no code HR5000
	Output	0-5 V 0-10 V 4-20 mA ¹⁾ RS485 A2 A3 A6 J3
	T-Sensor passive ²⁾	none Pt100A Pt1000A NTC 10k Ni1000 Tk6180 no code TP1 TP3 TP5 TP9
	Regional design	EU US no code RG2
	Display	none yes no code D1
	Output 1 CO ₂	Scaling according to selected "CO ₂ Range" as above
Setup - Analogue outputs	Output 2 Temperature	T (°C) T (°F) no code MB2
	Scale 2 low	0 value ³⁾ no code SBL value
	Scale 2 high	50 value ³⁾ no code SBH value
	Output 3 Measurands	Relative Humidity (% RH) Dew Point (°C) Dew Point (°F) none MC10 MC52 MC53 no code
	Scale 3 low	0 value ³⁾ no code SCL value
	Scale 3 high	100 value ³⁾ no code SCH value
	Protocol	Modbus RTU ⁴⁾ BACnet MS/TP ⁵⁾ no code P3
Setup - Digital output	Baud rate	9600 19200 38400 57600 ⁶⁾ 76800 ⁶⁾ no code BD6 BD7 BD8 BD9
	Parity (Modbus)	no parity odd even no code PY0 PY2
	Stopbit (Modbus)	1 stopbit 2 stopbits no code BT2
	Unit	metric-SI non-metric no code U2

1) not with M12

2) not with J3

3) Within working range. For scaling beyond working range limits please contact the E+E sales representative.

4) Modbus Map and setup instructions: See User Guide and Modbus Application Note at www.epluse.com/EE800

5) Product Implementation Conformance Statement (PICS) available at www.epluse.com/EE800

6) Only for BACnet

Order Example

EE800-M11A3

Model: CO₂ + T
CO₂ Range: 0 - 2000 ppm
Output: 0-10V
Regional design: EU
Output 2 Temperature: T (°C)
Temperature Scale: 0...50

EE800-M12A3MC52SCL-10SCH10

Model: CO₂ + T + RH
CO₂ Range: 0 - 2000 ppm
Output: 0-10V
Regional design: EU
Output 2 Temperature: T (°C)
Temperature Scale: 0...50
Output 3: Dew Point (°C)
Dew Point Scale: -10...10

EE800-M12HR5000J3RG2D1P3BD8PY2BT2U2

Model: CO₂ + T + RH
CO₂ Range: 0 - 5000 ppm
Digital output: RS485
Regional design: US
Display: yes
Protocol: BACnet
Baud rate: 57600
Parity: even
Stopbit: 2
Unit: non-metric

Accessories (see data sheet „Accessories“)

USB configuration adapter
Product configuration software

HA011066

EE-PCS (free download: www.epluse.com/configurator)

v1.1 / Modification rights reserved **EE800**