

EE160


Specially designed for HVAC, the EE160 sensor by E+E Elektronik is a cost-effective, highly accurate and reliable solution for measuring relative air humidity and temperature.

The enclosure minimizes installation costs and provides outstanding protection against contamination and condensation, thus ensuring flawless operation.

The EE160 employs the new humidity/temperature E+E sensor element HCT01 with excellent long term stability and resistance against pollutants. In combination with a long calibration experience, the EE160 provides a measurement accuracy of $\pm 2.5\%$ RH and is available for wall or duct-mounted with current, voltage or Modbus RTU output.

The configuration equipment allows user setup for the output scaling and for the interface parameters, as well as humidity and temperature adjustment of the sensor.

HVAC Humidity and Temperature Transmitter

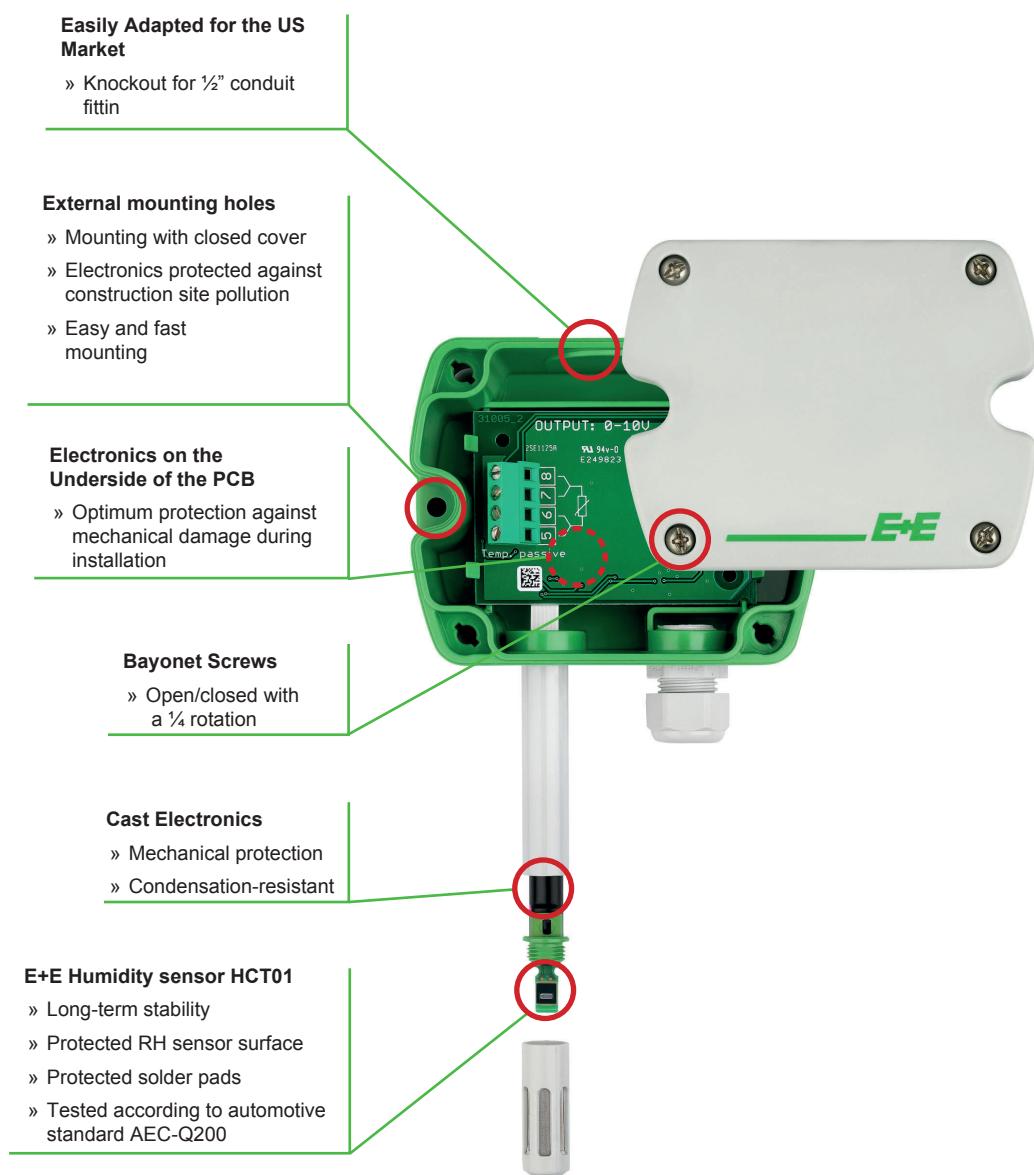

Technical data

Measured values

Relative Humidity

| | | |
|---------------------------|-------------------------|----------------------------|
| Sensor | E+E Sensor HCT01-00D | |
| Analog output 0...100% RH | 0-10 V | -1 mA < I_L < 1 mA oder |
| | 4-20 mA (two-wire) | $R_L \leq 500 \text{ Ohm}$ |
| Digital output | RS485 | |
| Working range | 10...95% RH | |
| Accuracy at 20°C | $\pm 2.5\%$ RH | |
| Temperature dependency | typ. $\pm 0.03\%$ RH/°C | |

Temperature

| | | |
|-----------------------------|--|--|
| Sensor | Pt1000 (tolerance class B, DIN EN 60751) | |
| Analog output ¹⁾ | 0-10 V | |
| | 4-20 mA | |
| Digital output | RS485 | |
| T-Accuracy at 20°C | $\pm 0.3^\circ\text{C}$ | |
| passive T-output | see ordering code | |


General

| | |
|-------------------------------|---|
| Power supply | |
| for 0 - 10 V / RS485 | 15 - 35V DC or 24V AC $\pm 20\%$ |
| for 4 - 20 mA | $10\text{V} + R_L \times 20 \text{mA} < U_V < 35\text{V DC}$ |
| Current consumption | |
| Analog | with DC power supply typ. 5mA |
| Digital | with AC power supply typ. 13mA _{eff} |
| | with DC power supply typ. 15mA |
| | with AC power supply typ. 25mA _{eff} |
| Connection | Screw terminals, max. 1.5 mm ² |
| Housing / protection class | Polycarbonate (UL listed) / IP65 |
| Cable gland | M16 x 1.5 |
| Sensor protection | membrane filter |
| Electromagnetic compatibility | EN61326-1 EN61326-2-3 |
| Temperature ranges | Operating temperature: -15...60°C (-5...140°F) Storage temperature: -25...60°C (-13...140°F) |





¹⁾ Output scaling see Ordering Guide

Dimensions (mm)

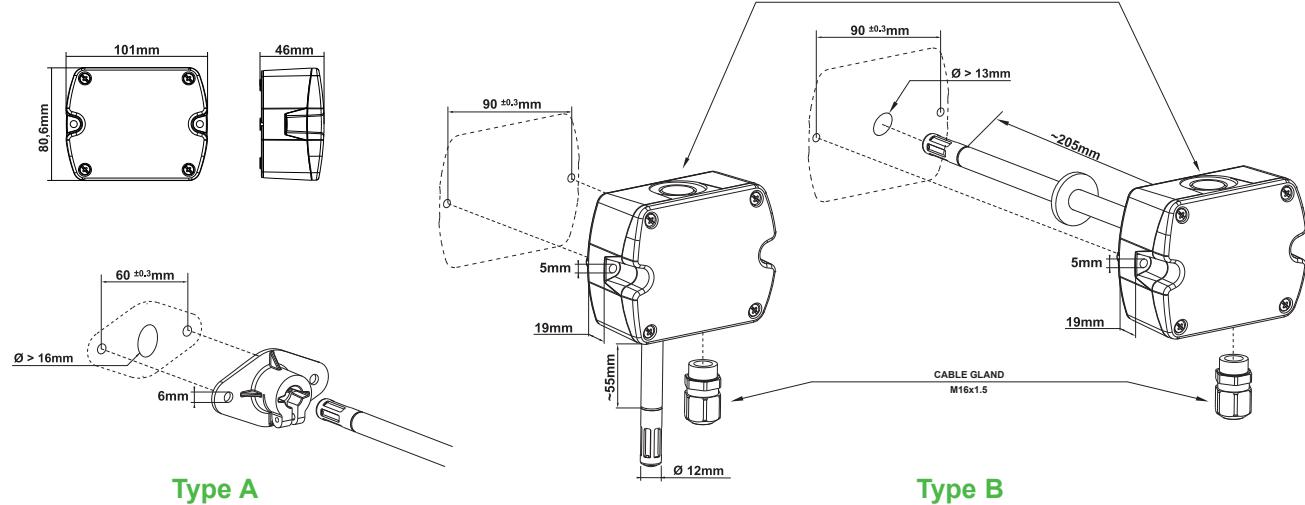

Connection diagram

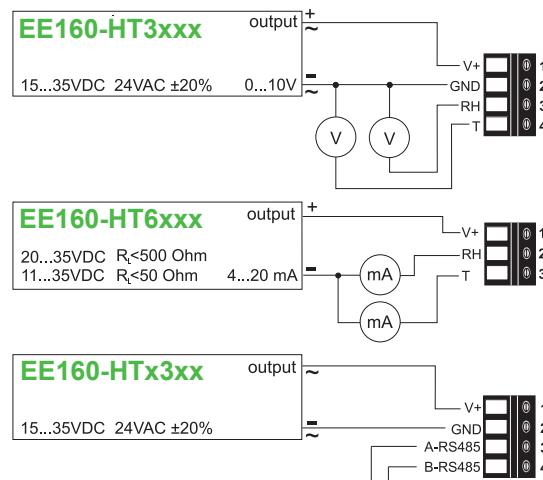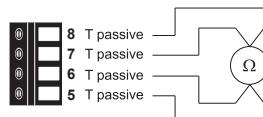

Ordering Guide

Configuration

| Mod El | ANALo G ¹⁾ | digitAI 1) | PASSIVE T-SENSo R ²⁾ | Ho USING | TYPE | f II TER |
|-----------------------------|-------------------------|-------------------|---------------------------------|--|--------------------------|---|
| humidity + temperature (HT) | 0-10V 4-20mA none | (3) (6) (x) | RS485 none | Pt 100 DIN A Pt 1000 DIN A NTC 10k none | (A) (C) (E) (x) | polycarbonate (P) duct mount (A) (B) |
| EE160- | | | | | | |

Interface parameter - analog output

| o UTPUT SCAI ING | SCAI ING | UNIT |
|------------------|--|---|
| temperature (Tx) | °C -20...80 (024) -40...60 (002) -10...50 (003) 0...50 (004) | °F -32...122 (076) -40...140 (083) 0...180 (026) |
| | other Scalings see Datasheet „T-Scaling“ | metric (M) non-metric (N) |

Interface parameter - digital output*

| PRo ToCol | BAUdRATE | PARITY | STo PBITS | UNIT |
|-----------|----------------------------|--------------------------------------|--------------------------------|--------------------------------------|
| modbus | (1) 9600 19200 38400 | (A) odd (B) even (C) no parity | (o) 1 stopbit (E) 2 stopbit | (1) metric (M) (2) non-metric (N) |
| | | | | |

¹⁾a combination of analog and digital version is not possible ²⁾analogue version only

Accessories

Configuration equipment: The configuration equipment allows user setup for the output scaling and for the interface parameters, as well as humidity and temperature adjustment of the sensor.

Position 1:

- configuration adapter (incl. USB cable for PC) (HA011050)

Position 2:

- for EE160 analog: cable for configuration adapter (HA011059)
- for EE160 digital: cable for configuration adapter (HA011055)

Position 3:

- configuration software: free of charge; download: www.epluse.com/EE160

Position 4 - optional:

- power supply for EE160 (V03)



Order example

Analog output

EE160-HT6xAPAB-Tx001M

Model: humidity + temperature transmitter
Analog output: 4-20mA
Passive T-Sensor: Pt 100 DIN A
Housing: polycarbonate
Type: wall mounting
Filter: membrane filter
Output scaling: temperature
Scaling: -30...40°
Unit: metric

Digital output

EE160-HTx3xPBB-1AE1N

Model: humidity + temperature transmitter
Digital output: RS485
Housing: polycarbonate
Type: duct mounting
Filter: membrane filter
Protocol: Modbus
Baudrate: 9600
Parity: even
Stopbits: 1
Unit: non-metric