

Level measurement

Continuous level measurement – Ultrasonic controllers

SITRANS LU01 and LU02

Overview



4

The SITRANS LU01 is an ultrasonic long-range level controller for liquids and solids in a single vessel up to 60 m (200 ft). Handheld programmer shown is an accessory and must be ordered separately.

Benefits

- Single point, long-range level monitoring
- Easy to install; easy to program using removable infrared keypad (optional)
- Compatible with all EchoMax transducers
- Backlit LCD display with reading in standard engineering units
- Automatic level-to-volume conversion for standard or custom tank shapes
- Dolphin Plus compatible
- High/low alarms

Application

The system consists of a SITRANS LU01 monitor linked to a non-contacting ultrasonic transducer that can be mounted up to 365 m (1 200 ft) away. The SITRANS LU01 will measure distance, level or volume, and it features patented Sonic Intelligence echo processing software for superior reliability.

Readings are displayed in user-selectable linear engineering units on the backlit LCD.

Modules for popular industrial buses can be factory installed or added later to meet changing needs. No external gateway is required, reducing hardware and cabling costs.

- Key Applications: chemical storage, liquid storage, bulk solids storage (gravel, flour bins, grains, cereals), plastic pellets

Overview



The SITRANS LU02 is a dual point ultrasonic long-range level controller for liquids and solids in one or two vessels up to 60 m (200 ft). Handheld programmer shown is an accessory and must be ordered separately.

Benefits

- Dual point, long-range level monitoring
- Easy to install; easy to program using removable infrared keypad (optional)
- Compatible with all EchoMax transducers
- Backlit LCD display with reading in standard engineering units
- Automatic level-to-volume conversion for standard or custom tank shapes
- Dolphin Plus compatible
- High/low alarms

Application

SITRANS LU02 will measure liquids, solids or a combination of both in one or two vessels of different sizes, shapes and configurations up to 60 m (200 ft).

The system uses ultrasonic technology to measure level, space, distance, volume or average/differential. It features patented Sonic Intelligence echo processing software for superior reliability. Transducers can be mounted up to 365 m (1 200 ft) from the monitor.

Readings are displayed in user-selectable linear engineering units on the backlit LCD.

- Key Applications: chemical storage, liquid storage, bulk solids storage (gravel, flour bins, grains, cereals), plastic pellets, tripper car

Level measurement

Continuous level measurement – Ultrasonic controllers

SITRANS LU01 and LU02

Technical specifications

| Mode of operation | |
|--|---|
| Measuring principle | Ultrasonic level measurement |
| Measuring range | 0.3 ... 60 m (1 ... 200 ft) |
| Measuring points | SITRANS LU01: Max. one point; SITRANS LU02: Max. two points |
| Output signal | |
| Ultrasonic transducer | EchoMax series, ST-H transducers |
| Relays | 4 SPDT Form C relays, rated at 5 A at 250 V AC, resistive load |
| mA output | 0/4 ... 20 mA, optically isolated <ul style="list-style-type: none">• Max. load 750 Ω, isolated, 30 V• Resolution 0.1 % of range• Outputs SITRANS LU01: Max. one mA output SITRANS LU02: Max. two mA outputs |
| Accuracy | |
| Error in measurement | 0.25 % of range or 6 mm (0.24 inch), whichever is greater |
| Resolution | 0.1 % of measuring range or 2 mm (0.08 inch), whichever is greater |
| Temperature compensation | -50 ... +150 °C (-58 ... +302 °F) <ul style="list-style-type: none">• Integral temperature sensor• External TS-3 temperature sensor (optional)• Programmable fixed temperature |
| Rated operating conditions | |
| Ambient conditions | |
| Ambient temperature for enclosure | -20 ... +50 °C (-4 ... +122 °F) |
| Design | |
| Weight | 2.7 kg (6 lb) |
| Material (enclosure) | Polycarbonate |
| Degree of protection (wall mount) | IP65 |
| Electrical connection | |
| Ultrasonic transducer cable extension mA output signal | RG62-A/U coaxial cable with low capacitance 2-core copper conductor, twisted, shielded, 0.5 ... 0.75 mm ² (22 ... 18 AWG), Belden 8760 or equivalent is acceptable |
| Electrical connection and relay connection | Copper conductor according to local requirements, rated 250 V 5 A |
| Synchronization | Up to 16 LU01/LU02 units can be synchronized together |

| Power supply | |
|-----------------------------------|--|
| AC model | 100/115/200/230 V AC ± 15 %, 50/60 Hz, 31 VA |
| DC model | 18 ... 30 V DC, 25 W |
| Displays and controls | 51 x 127 mm (2 x 5 inch) graphics LCD with backlighting |
| Memory | EEPROM (non-volatile), no backup battery required |
| Programming | Using removable programmer (ordered separately) or Dolphin Plus (option) |
| Certificates and approvals | CE, CSA _{US/C} , FM, ATEX II 3D Lloyd's register of Shipping (Categories ENV1, ENV2, ENV3 and ENV5) |
| Options | |
| External temperature sensor | TS-3 |
| Communications | <ul style="list-style-type: none">• Dolphin Plus: Siemens Windows-compatible interface and ComVerter link (infrared) |

| Selection and Ordering data | | Article No. |
|--|---|-----------------|
| SITRANS LU01/LU02 | | 7ML5004- |
| Single or dual point ultrasonic long-range level monitoring system for liquids and solids, and ranges up to 60 m (200 ft). | | |
| 1 | | |
| 2 | | |
| | A | |
| | B | |
| | | |
| | | |
| | | |
| Number of measuring points | | |
| LU01 version, 1 point | | |
| LU02 version, 2 points | | |
| Input voltage | | |
| 100/115/200/230 V AC, voltage selector switch | | |
| 18 ... 30 V DC | | |
| Feature software | | |
| Standard | | |
| Application software | | |
| Standard | | |
| Data communications | | |
| No module (SmartLinx ready) | | |
| Enclosure | | |
| Wall mount | | |
| Wall mount, drilled, 6 x M20 | | |
| Note: Cable glands are not included and should be ordered as a separate line on the order. | | |
| Approvals | | |
| CE, CSA _{US/C} , FM ¹⁾ | | |
| CE | | |
| ATEX II 3D ²⁾ | | |

¹⁾ Available with enclosure option 1 only

²⁾ Available with enclosure option 3 only

Level measurement


Continuous level measurement – Ultrasonic controllers

SITRANS LU01 and LU02

| Selection and Ordering data | Order code | |
|---|----------------------|---|
| Further designs Please add "-Z" to Article No. and specify Order code(s). | | |
| Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 27 characters) specify in plain text | Y15 | M20 cable gland kit (4 M20 cable glands, 4 M20 nuts, 4 washers) 7ML1930-1FV |
| Operating Instructions SITRANS LU01 | Article No. | TS-3 Temperature Sensor - see TS-3 on page 4/190 7ML1830-2AN |
| English | 7ML1998-5BE02 | Sunshield kit, 304 stainless steel 7ML1930-1GA |
| French | 7ML1998-5BE12 | |
| German | 7ML1998-5BE32 | |
| <u>SITRANS LU02</u> | | Spare parts |
| English | 7ML1998-5BD02 | Card, LU01 mother main, AC, comm ready 7ML1830-1KX |
| French | 7ML1998-5BD12 | Card, LU02 mother main, AC, comm ready 7ML1830-1MA |
| German | 7ML1998-5BD32 | Card, LU02 daughter, comm ready 7ML1830-1LP |
| | | Card, LU01 daughter, comm ready 7ML1830-1LN |
| | | Card, display See SmartLinx product page 4/337 for more information. 7ML1830-1LQ |
| Selection and Ordering data | Article No. | |
| Accessories | | |
| Handheld programmer | 7ML1830-2AN | |
| Tag, stainless steel, 12 x 45 mm (0.47 x 1.77 inch), one text line, suitable for enclosures | 7ML1930-1AC | |
| M20 cable gland kit (6 M20 cable glands, 6 M20 nuts, 3 stop plugs) | 7ML1830-1GM | |

4

Dimensional drawings

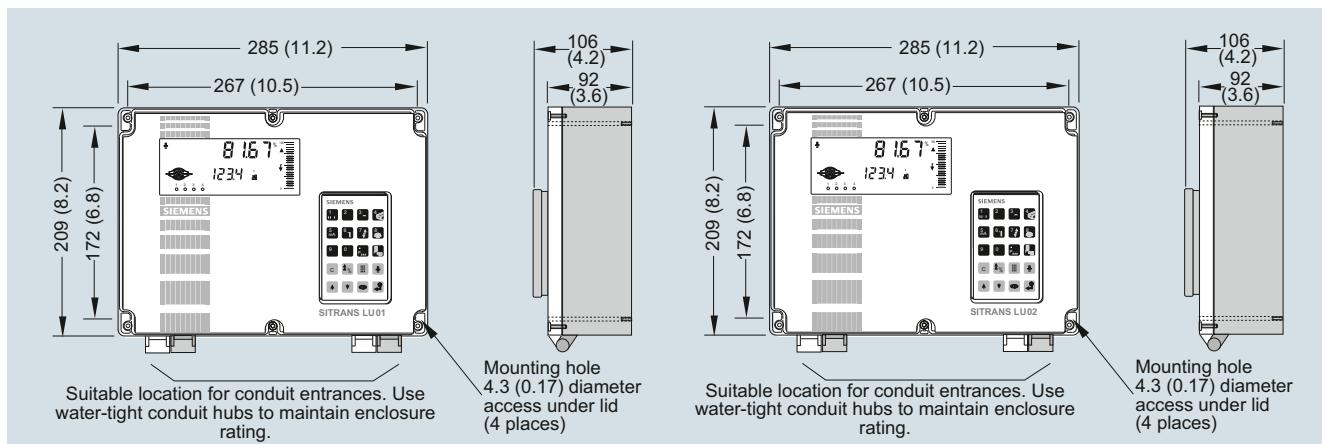


Dimensional drawings for SITRANS LU01 (left) and SITRANS LU02 (right), dimensions in mm (inch)

Level measurement



Continuous level measurement – Ultrasonic controllers

SITRANS LU01 and LU02

Schematics

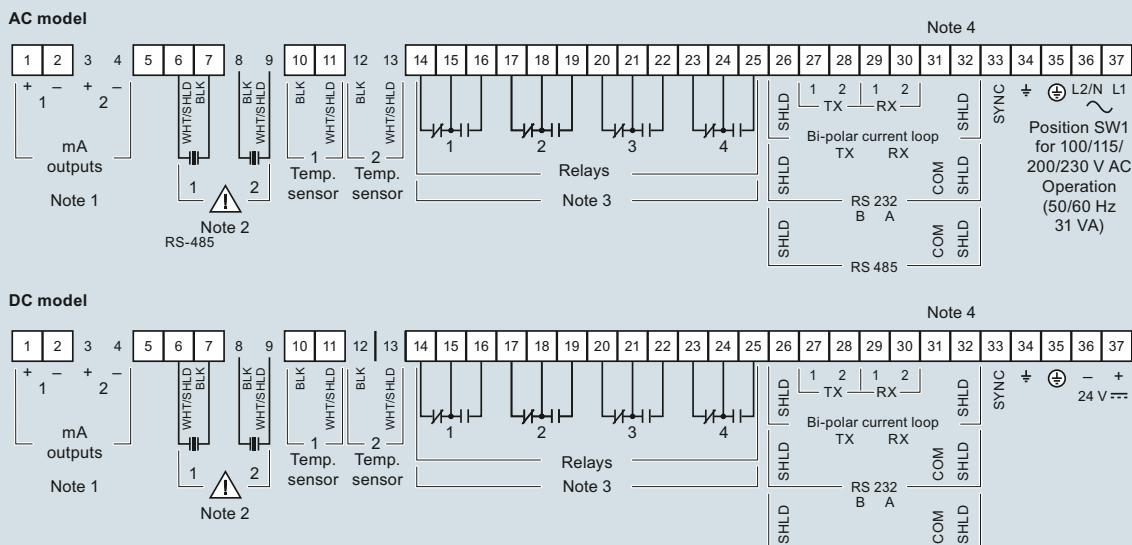

SITRANS LU01 connections

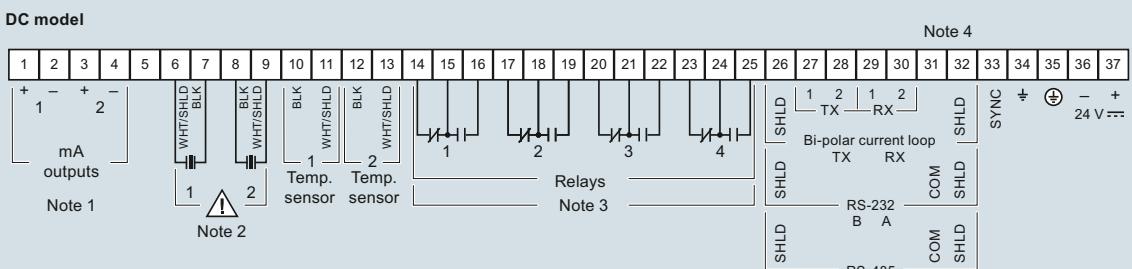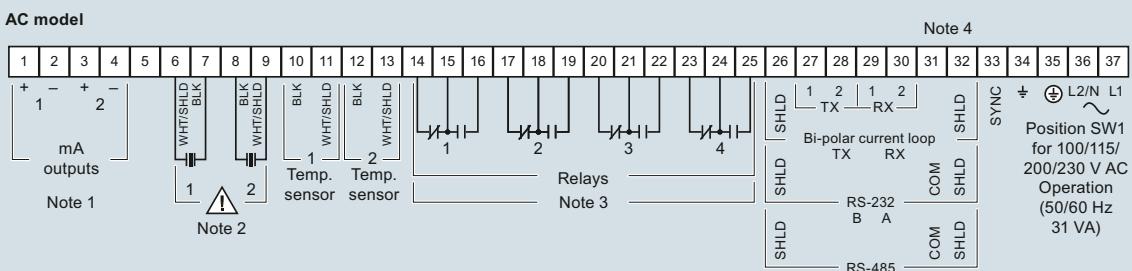

SITRANS LU02 connections

A.P.O. - ELMOS v.o.s., Pražská 90, 509 01 Nová Paka, Tel.: +420 493 504 261, Fax: +420 493 504 257, E-mail: apo@apoelmos.cz, Internet: www.apoelmos.cz